
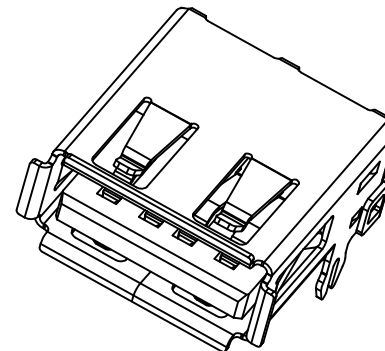
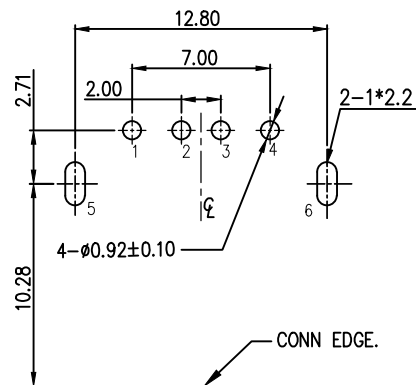


RoHS Compliant

REV.	ECN NO	LTR	DESCRIPTION	REVISER	DATE
A/0			Initial release.	Joe peng	2019.05.10

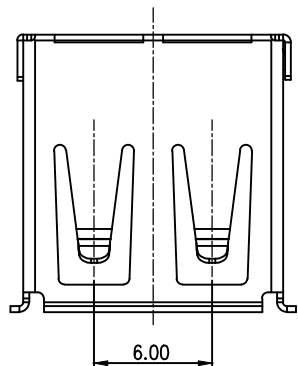

NOTE:

1. MATERIAL:

- 1.1 INSULATOR: PBT+30%GF, UL94V-0, COLOR: OPTIONAL
- 1.2 CONTACT: COPPER ALLOY
- 1.3 SHELL: SHELL: COPPER ALLOY

2. PLATING:

- 2.1 CONTACT: SELECTIVE GOLD PLATED ON CONTACT AREA 150u" Min. TIN PLATED ON SOLDER TAIL 50u" Min. NICKEL UNDER-PLATED
- 2.2 SHELL: 50u" Min. NICKEL PLATED OVERALL



3. CHARACTERISTICS:

- 3.1 ELECTRICAL CHARACTERISTICS:
CONTACT RESISTANCE: 30mΩ MAXIMUM
CONTACT CURRENT RATING: 1.5A
DIELECTRIC WITHSTANDING VOLTAGE: 500 V R.M.S.
INSULATION RESISTANCE 1000 MEGOHMS MIN
OPERATING TEMPERATURE: -25°C ~ +85°C


3.2 MECHANICAL:

- MATING FORCE: 3.57Kg.Max.
- UNMATING FORCE: 1.02Kg.Min.

- 5. THE DIMENSIONS WITH "▼" MARK ARE CRITICAL AND SHOULD BE CONTROLLED BY QC.

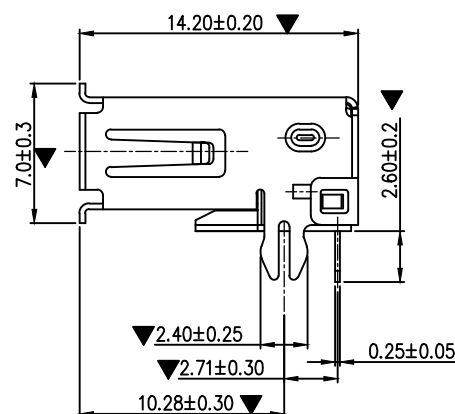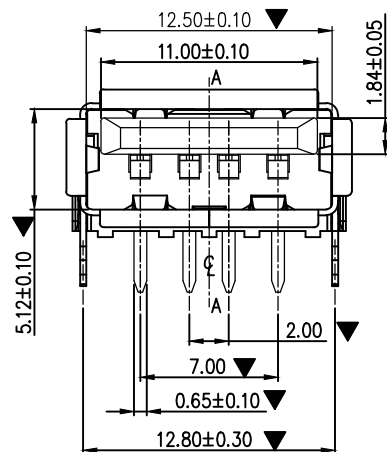

XianHe Logo





PART NUMBER INFORMATION

319AF-K-B3-6-BN-XX



Hsg.color:
W: White
K: Black


Terminal plating:
1: Gold flash
4: Gold 15u" on contact area.
6: Gold 30u" on contact area.

REV
B3: 普通规格
M1: 自动插件包装

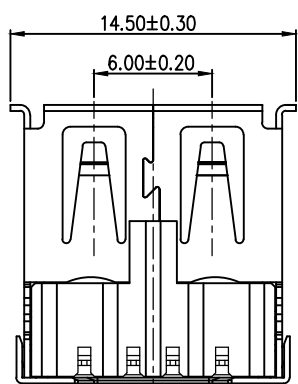

SECTION A-A

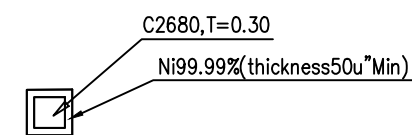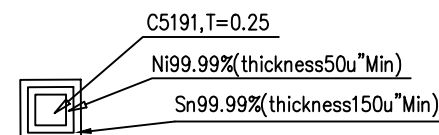

图号 (DWG NO)	G-319-S2-76	单位 (UNIT): MM	 显赫电子科技有限公司 Shenzhen Xianhe Technology Co.,Ltd TEL:0769-89138899 FAX:0769-89100950											
类别 (DWG TYPE)	SALES DWG	比例 (SCALE) 1:1												
版次 (REV): A/0	页次 (PAGE): 1/1													
设计 (DESIGN)	Joe peng	未注公差 TOLERANCE UNSPECIFIED <table><tr><td>X.X</td><td>± 0.38</td></tr><tr><td>X.XX</td><td>± 0.20</td></tr><tr><td>X.XXX</td><td>± 0.10</td></tr><tr><td>X"</td><td>± 5"</td></tr><tr><td>X.X"</td><td>± 2"</td></tr></table>	X.X	± 0.38	X.XX	± 0.20	X.XXX	± 0.10	X"	± 5"	X.X"	± 2"	品名 (ITEM NO)	USB-AF 90 DIP
X.X	± 0.38													
X.XX	± 0.20													
X.XXX	± 0.10													
X"	± 5"													
X.X"	± 2"													
审核 (CHECKED)			料号 (PART NO)	319AFKB36BNHF										
核准 (APPROVED)														